

tomography



crosshole



downhole



surface seismic



geotomographie

manufacturer of seismic borehole equipment




MBAS-D | Digital Multistation Borehole Acquisition System


The multistation borehole acquisition system (MBAS) is a digital three-component geophone string used to receive P- and S-waves in dry or water filled boreholes. The system is especially designed for S-wave borehole tomography.



Array of seven three-component stations.

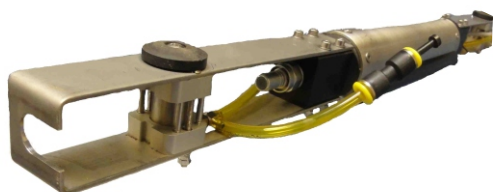

An individual station.

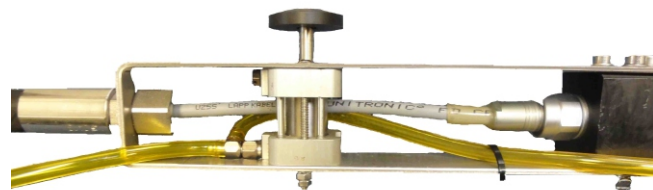

Pneumatic coupling mechanism (cylinder).


Technical Details

Natural sensor frequency: 10 Hz
Sensor arrangement: Tri-axial
Operational depth: Up to 100 m
Max. number of stations: 10
Station interval: 1 or 2 m
Station length: 735 mm
Station diameter: 65 mm
Station weight: 2.5 kg
Cable weight per metre: 460 g
Borehole diameter: 75 mm
Clamping system: Pneumatic cylinders
Orientation: Torsionally stiff hose
Depth indicator: Cable marking every 2 m
Storage: On drum and in boxes

Digitisation

Design: Micromed
Power supply: PC USB interface
A/D conversion: 24 bit @ 128 Hz sampling frequency
Sampling frequencies: 256-32768 Hz
Trace length: Max. 4 s
Trigger: TTL, geophone
Software: Soilspy (Micromed)

Data Example

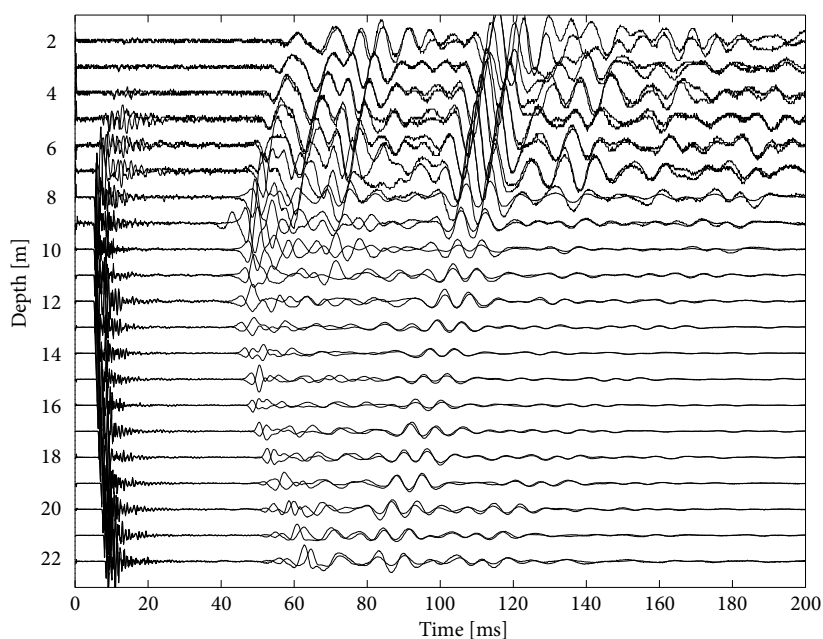

Unconsolidated sediments
Borehole Distance: 10 m