

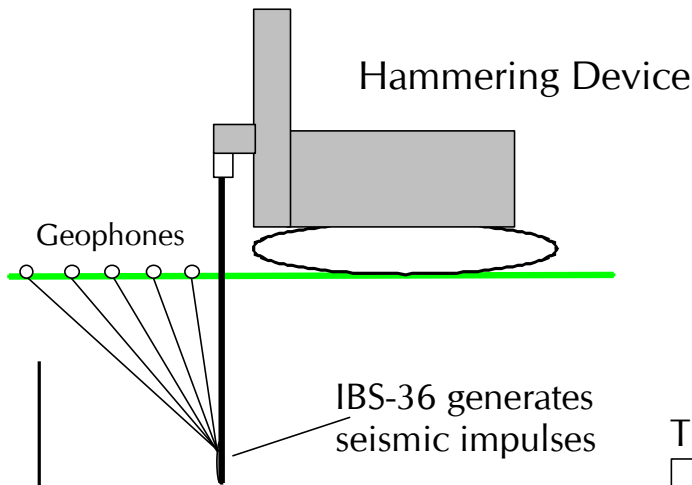


P-Wave Profiling and Tomography

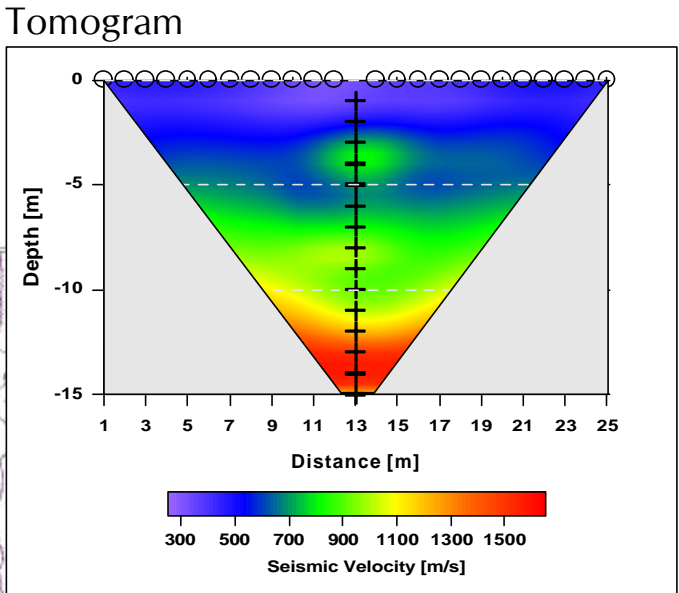

The IBS or HBH source can be used to obtain tomographic information from subsurface if more than one surface receiver is used. At each depth position shots can be released and recorded at several geophones. Geophones can also be assembled in circles around the source hole to obtain 3D information.

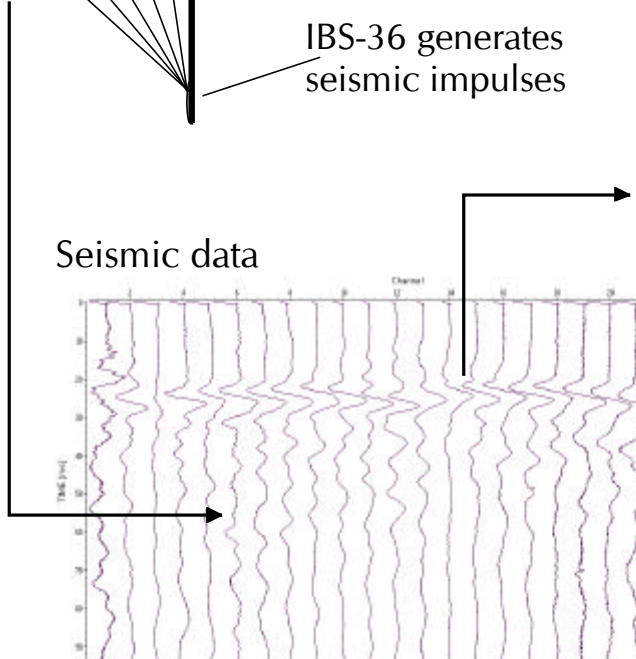

Top View for 3D Survey

